

FIGURE 1A



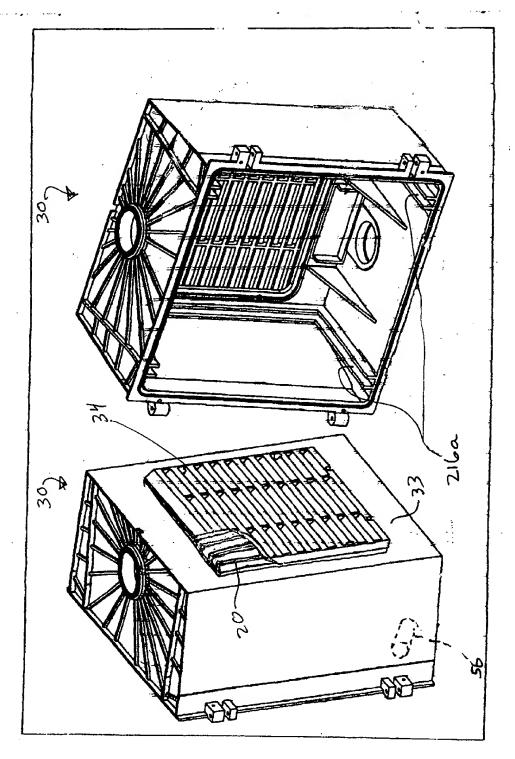


FIGURE 1B

12 13.

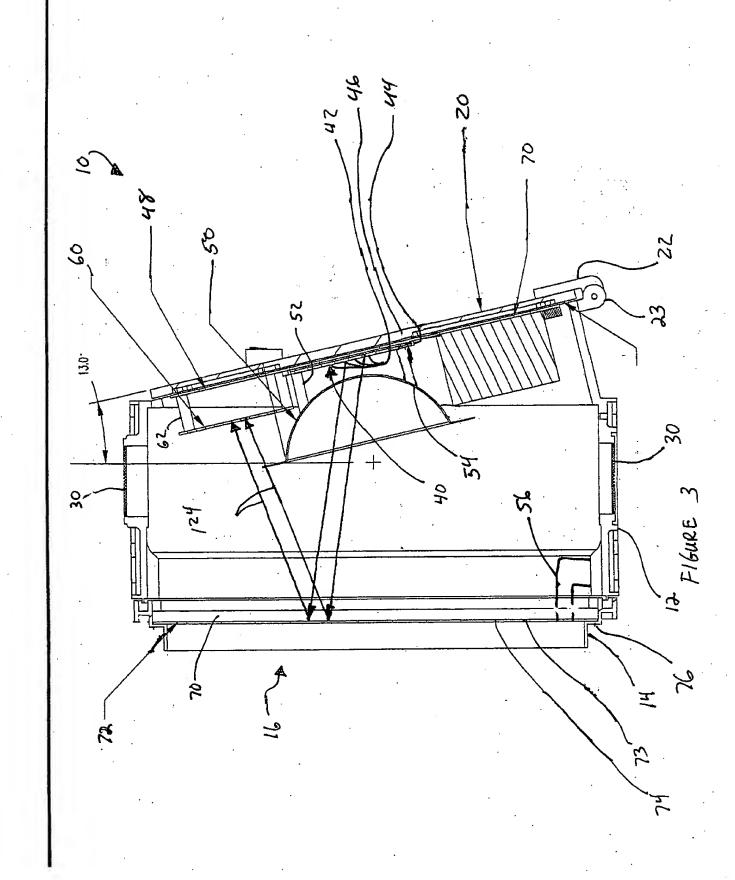


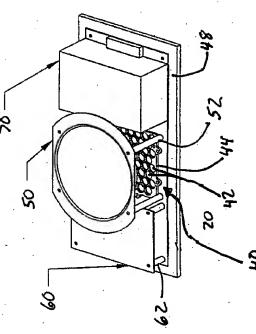


Ś


FIGURE 4

FIGURE S

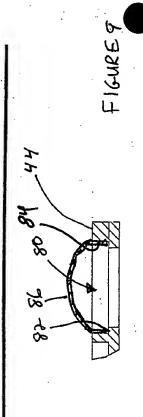

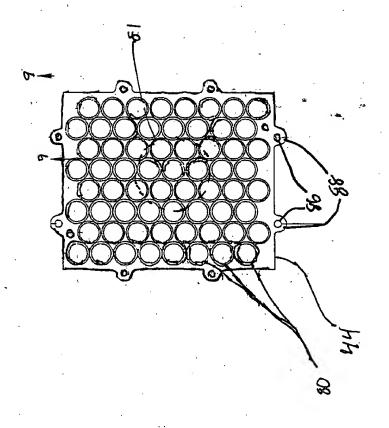

CIGURE 8

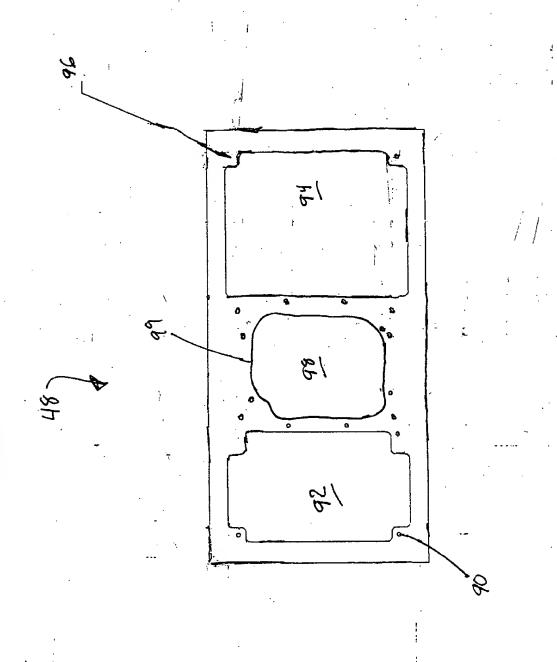


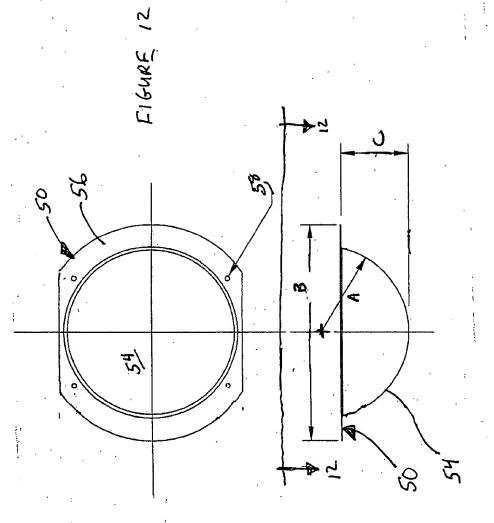


FIGURE 11

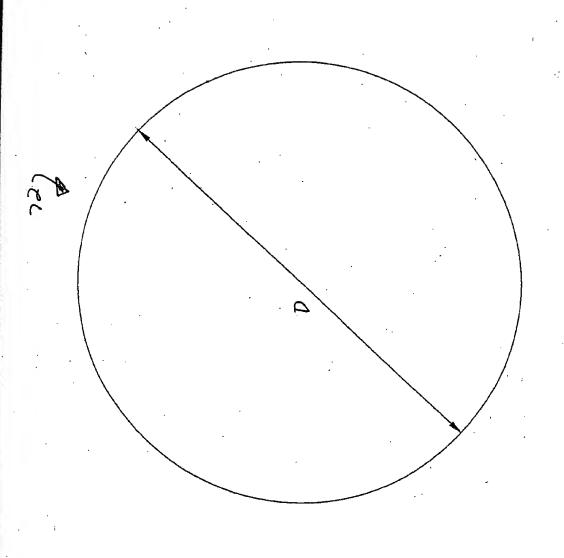

F16URE U

Figure 144

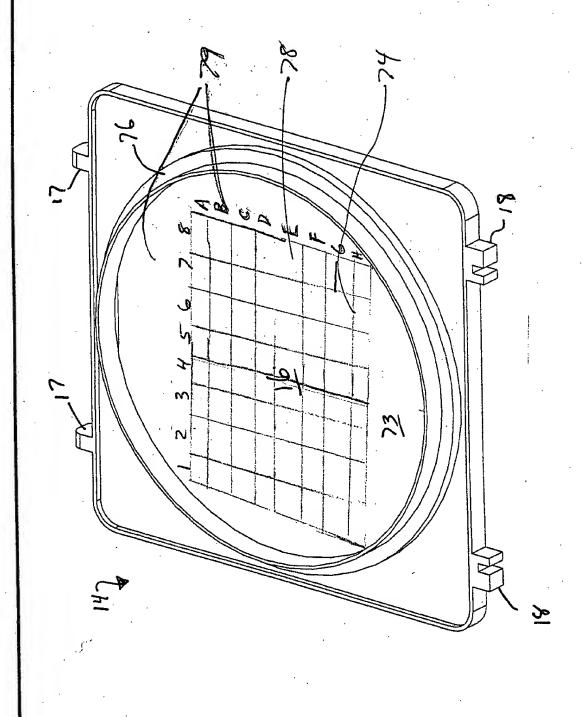


FIGURE 148


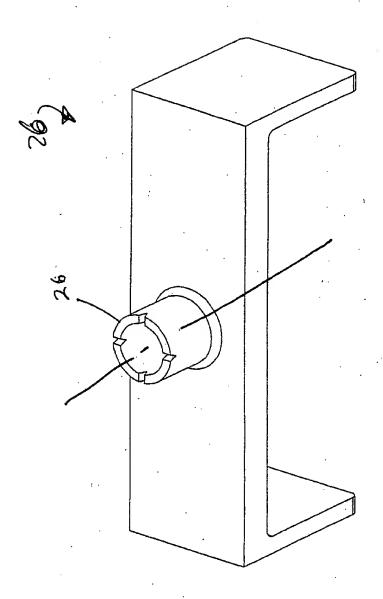


FIGURE 15

5 ed for for Less for fort

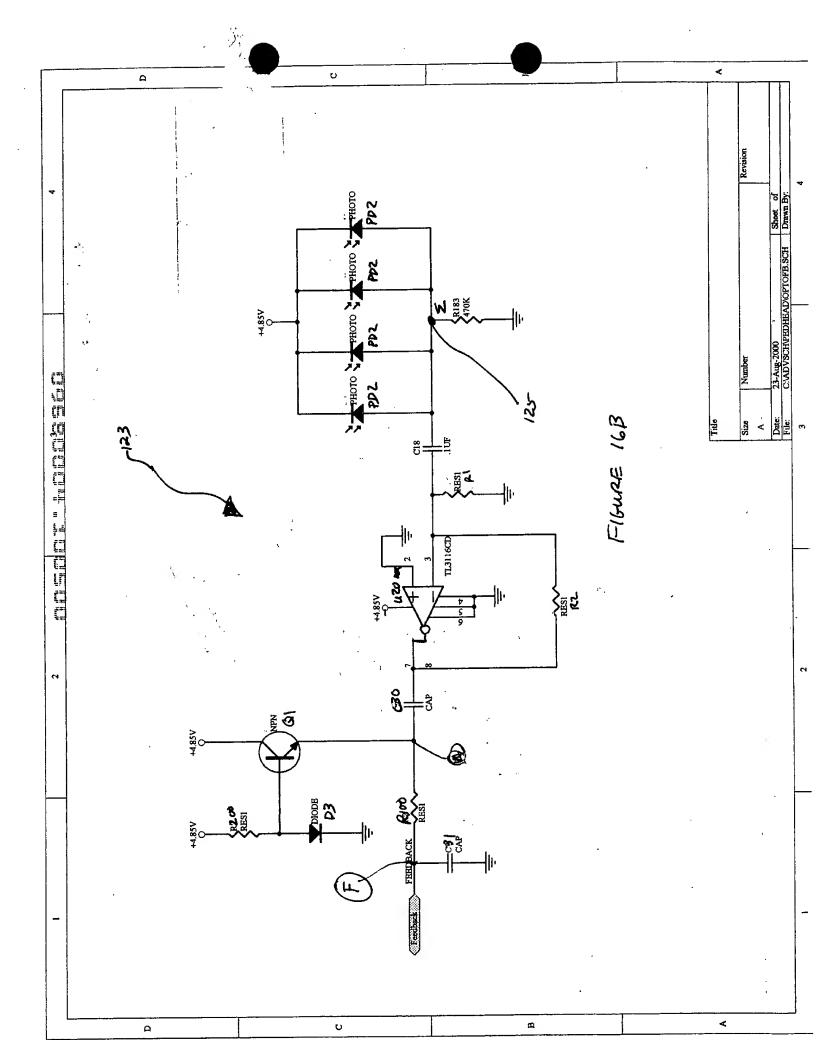

oosacour locaco

20% Dety Cycle (Imv) 20% Duty Cycle (4mu) (1mm) 50% Duty Cyde Figure 16F Flowar 16E FIGURE 16D tar 对主K

SENSE
BACKSCATTERED
LIGHT USING FAE
PLURALITY OF
Photodiodes

ADJUST


DRIVE CURRENTS

TO LEDS AS

A FUNCTION OF

SENSED BACKSCATTERED

LIGHT

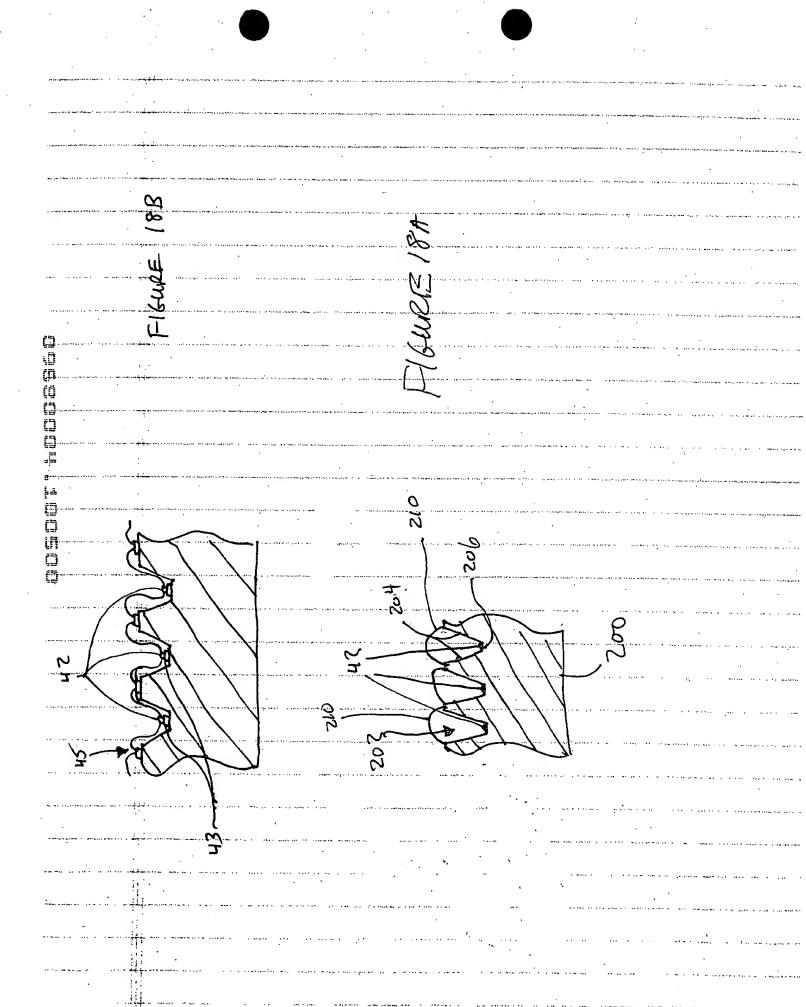

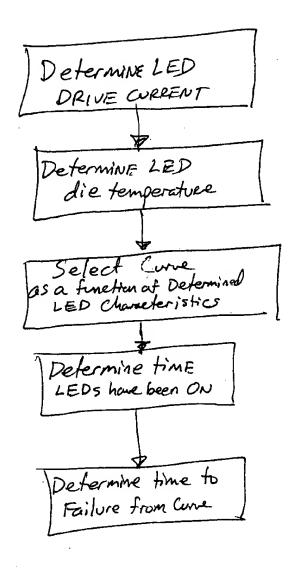
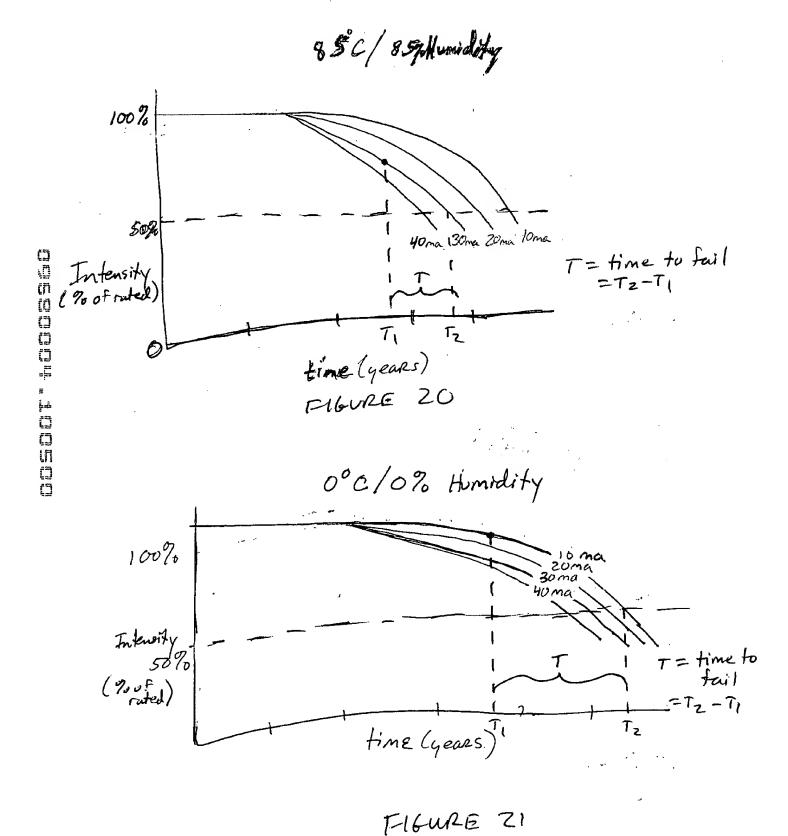


Figure 19



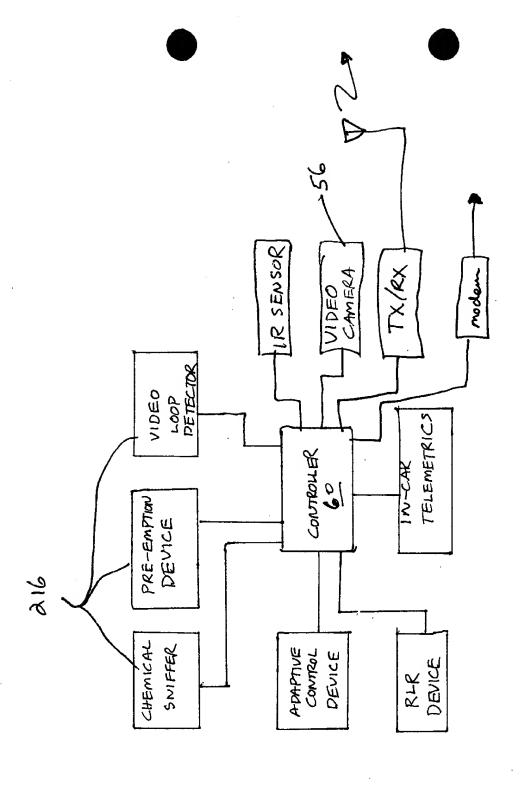


FIGURE 22


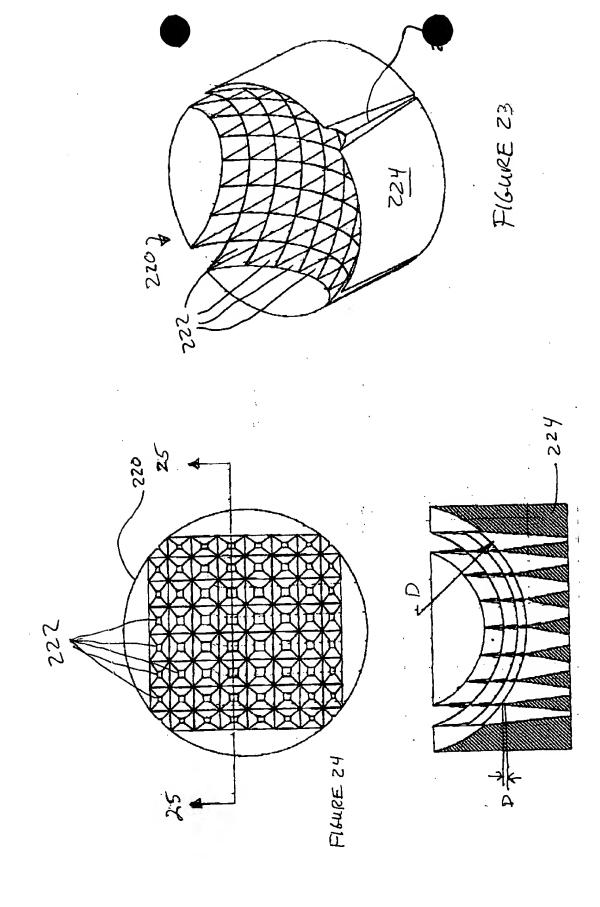


FIGURE 25

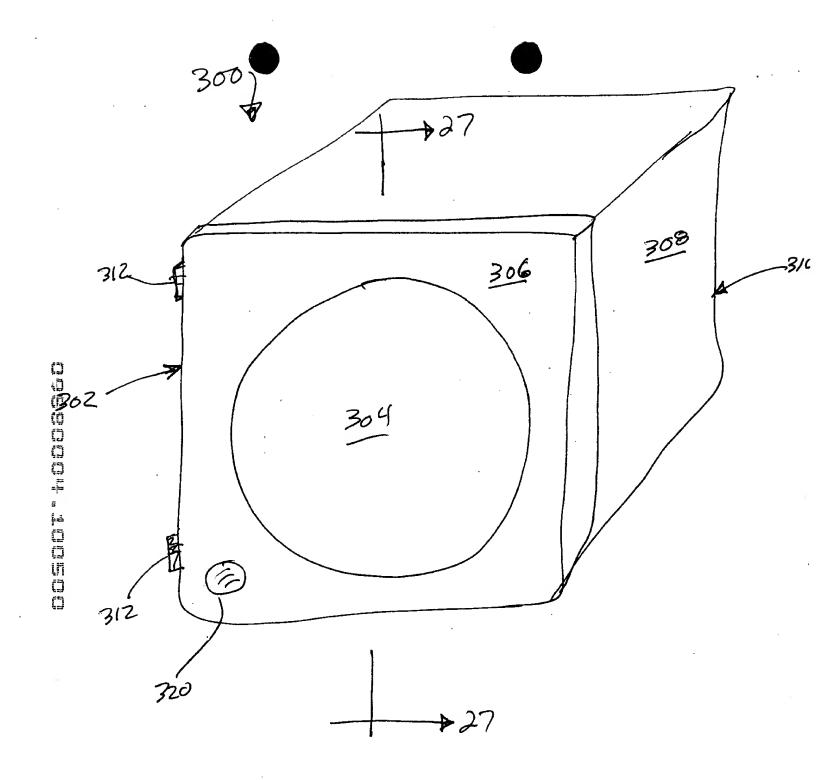

FIGUREZG

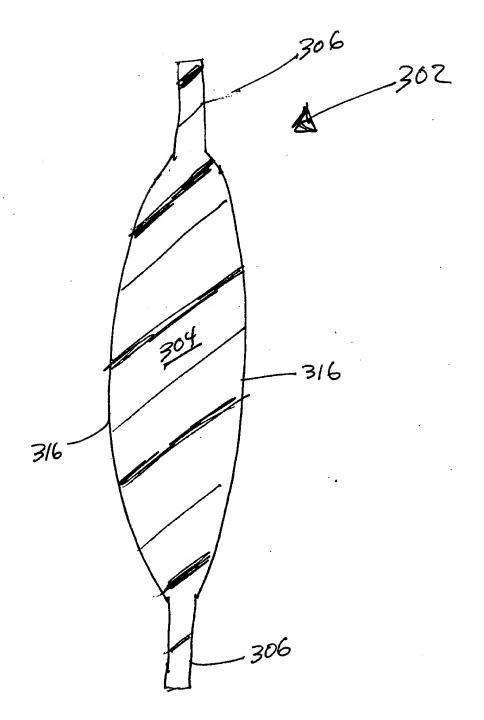


FIGURE 27